




Splitter box

ZDO4H050MSS0000-00STAK190MSS

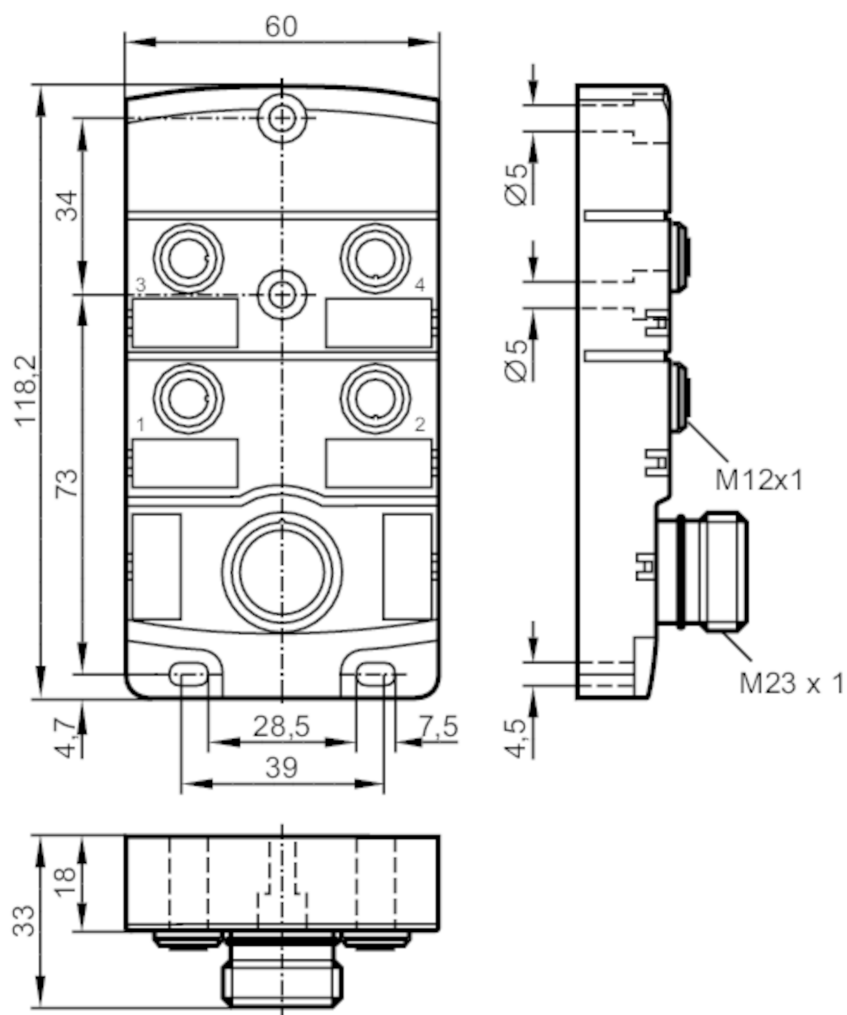

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67; ("enclosure type 1" according to cULus)



Splitter box

ZDO4H050MSS0000-00STAK190MSS


Mechanical data	
Weight [g]	223.6
Dimensions [mm]	33 x 60 x 118.2
Materials	PA
Number of ports splitter box	4
Connector type	M12

Accessories	
Accessories (supplied)	Protective caps: 2 labels: 4


Remarks	
Pack quantity	1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

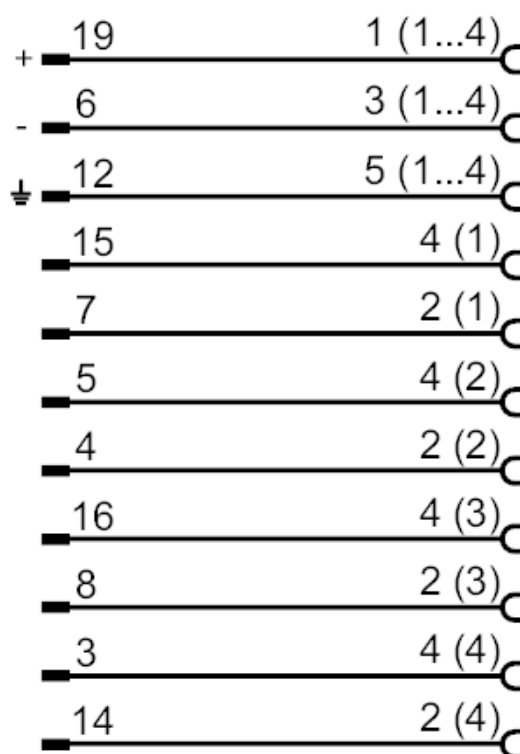

Electrical connection - slot

Connector: 4 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

EBC003



Splitter box

ZDO4H050MSS0000-00STAK190MSS

