

# Product data sheet

## Characteristics

# K10D012UCH

cam changeover switch - 2-pole - 60° - 10 A -  
for Ø 16 or 22 mm



### Main

Range of product	Harmony K
Product or component type	Complete cam switch
Component name	K10
[Ith] conventional free air thermal current	10 A
Product mounting	Front mounting
Fixing mode	Ø 16 or 22 mm hole
Cam switch head type	With front plate 30 x 30 mm
Type of operator	Black handle
Rotary handle padlocking	Without
Presentation of legend	With metallic legend, 1 - 2 black marking
Cam switch function	Changeover switch
Return	Without
Off position	Without Off position
Poles description	2P
Switching positions	Left: 330° Right: 30°
IP degree of protection	IP65 (operating head) conforming to IEC 60529 IP20 (contact block)

### Complementary

Switching angle	60 °
[Ui] rated insulation voltage	440 V, degree of pollution: 3 conforming to IEC 60947-1
Rated operational power in W	750 W AC-23A, 220/240 V 1 phase 370 W AC-23A, 110/120 V 1 phase 1800 W AC-23A, 220/240 V 3 phases
Rated power in hp	0.75 hp at 220/240 V AC, 1 phase 0.75 hp at 110/120 V AC, 3 phases 0.33 hp at 110/120 V AC, 1 phase 1 hp at 220/240 V AC, 3 phases
[Ie] rated operational current AC	6 A at 120 V AC-15 3 A at 240 V AC-15 10 A at 400 V AC-21A 10 A at 400 V AC-1
[Ie] rated operational current DC	0.7 A at 110 V resistive load 0.3 A at 220 V resistive load 10 A at 24 V resistive load
Electrical durability	100000000 cycles
Short circuit protection	10 A by cartridge fuse, type gG
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Contacts operation	Slow-break
Electrical connection	Captive screw clamp terminals, clamping capacity: 2 x 1.5 mm <sup>2</sup>
Mechanical durability	1000000 cycles
CAD overall width	30 mm
CAD overall height	30 mm
CAD overall depth	88 mm
Product weight	0.045 kg

## Environment


Standards	EN/IEC 60947-5-1 EN/IEC 60947-3 CENELEC EN 50013
Product certifications	CULus
Protective treatment	TC
Ambient air temperature for operation	-20...55 °C
Ambient air temperature for storage	-40...70 °C
Class of protection against electric shock	Class II conforming to IEC 60536

---

Cam Switch

---

Front Mounting by Ø16 mm/0.63 in. or Ø 22 mm/0.87 in. hole

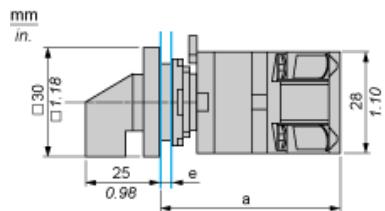

a 63 mm/2.48 in.


e support panel thickness: 0.5 mm to 5 mm/0.02 in. to 0.2 in.

---

### Cam Switch

---

Ø 16 mm/0.63 in. and Ø 22 mm/0.87 in. Panel Cut-outs

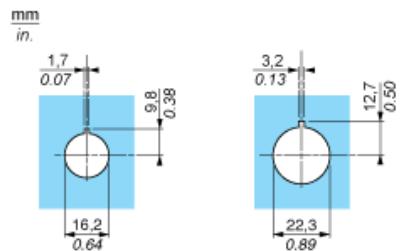


---

### Link Positions (Factory Mounted)

---

#### Diagram for 1 to 4-pole Switches


Select the number of poles according to the product characteristics.

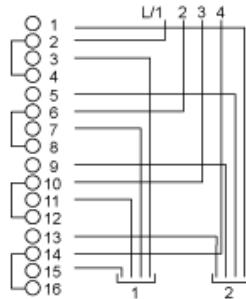

---

### Marking


---



---

### Angular Position of Switch

---




---

### Switching Program

---

#### Diagram for 1 to 4-pole Switches

Select the number of poles according to the product characteristics.



- (1) 1-pole
- (2) 2-pole
- (3) 3-pole
- (4) 4-pole

---

### Convention Used for Switching Program Representation

---

Contact closed

Contact closed in 2 positions and maintained between the 2 positions



Sealed assembly for auto-maintain control



Overlapping contacts



Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).

Example:

