


KB5004



Capacitive sensor

KB-3020-BPKG/NI

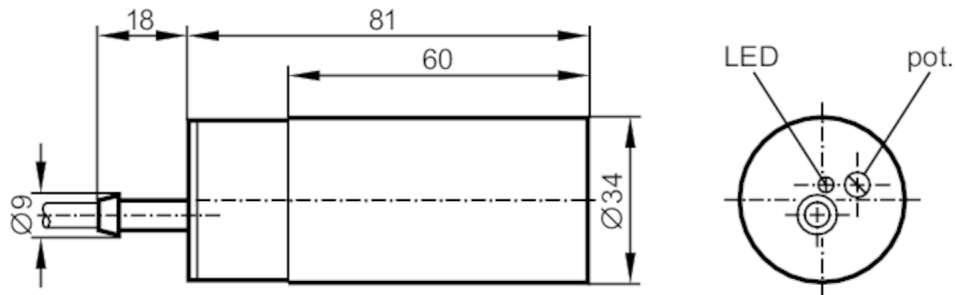

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	13; (24 V)
Protection class		II
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	40
Short-circuit proof		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	3...20
Sensing range adjustable		yes
Factory setting sensing range	[mm]	20
Real sensing range S_r	[mm]	$20 \pm 10 \%$
Operating distance	[mm]	0...16.2

Accuracy / deviations

Correction factor		glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2
Hysteresis	[% of S_r]	1...15
Switch point drift	[% of S_r]	-15...15

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 65
Increased immunity		yes; (increased immunity to conducted radio frequency interference)

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	778

KB5004



Capacitive sensor

KB-3020-BPKG/NI

Mechanical data		
Weight	[g]	254.6
Housing		cylindrical
Mounting		non-flush mountable
Dimensions	[mm]	Ø 34 / L = 81
Materials		PBT


Displays / operating elements		
Display	switching status	1 x LED, yellow

Accessories		
Accessories (supplied)	Mounting clamps: 1	
	screwdriver: 1	

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 2 m, PVC; 3 x 0.5 mm²	

Connection

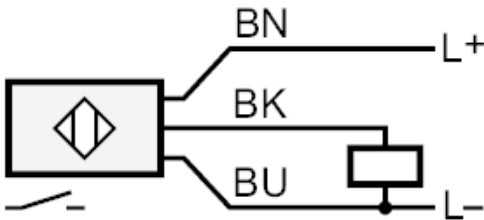

	Core colours :
BN =	brown
BU =	blue
BK =	black