



PLUG-IN RELAY COMPACT UNIT 24V DC,
2 CO LED MODULE RED SOCKET W. LOGIC ISOLATION
PLUG-IN TERMINAL (PUSH-IN)

General technical details:		
Type of voltage		DC
Control supply voltage		
• for DC / rated value		
• minimum	V	24
• maximum	V	24
Number of NC contacts		
• for auxiliary contacts		0
Number of NO contacts		
• for auxiliary contacts		0
Number of changeover contacts		
• for auxiliary contacts		4
Operating current / of the auxiliary contacts		
• at DC-13		
• at 24 V	A	8
• at AC-15		
• at 230 V	A	5
Design of the switching function		changeover switch
• guided		No
Switching behaviour		monostable

Mechanical design:

Design of the electrical connection		spring-loaded terminals
Design of the relay operating mechanism		poled
Product component / jumper socket		Yes
Width	mm	28
Height	mm	79
Depth	mm	98

Certificates/approvals:

General Product
Approval

other



[Declaration of
Conformity](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/LZS:PT2D5L24/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=LZS:PT2D5L24

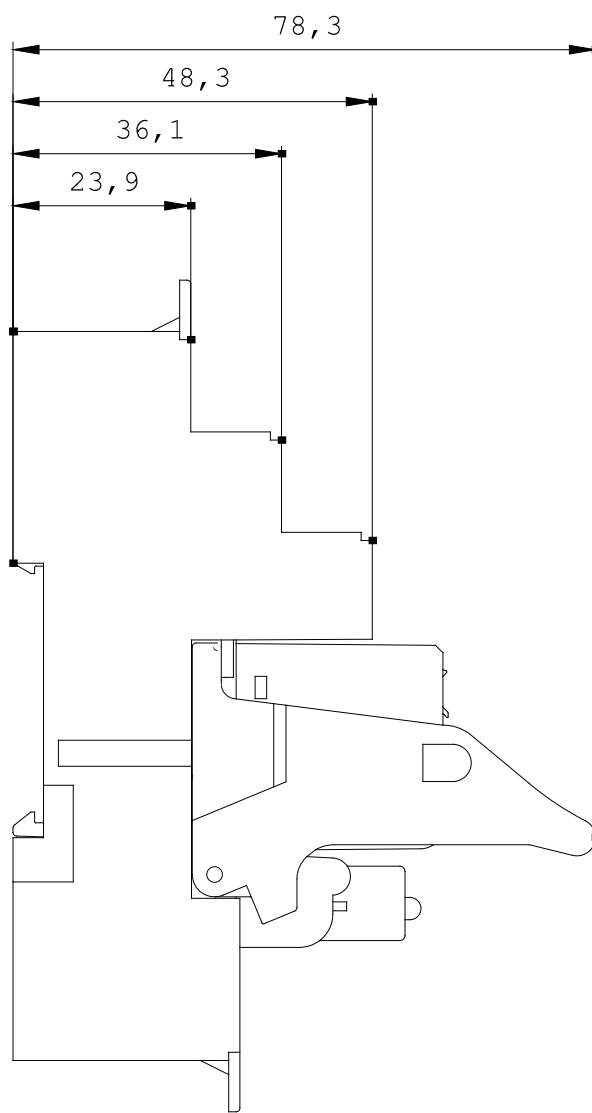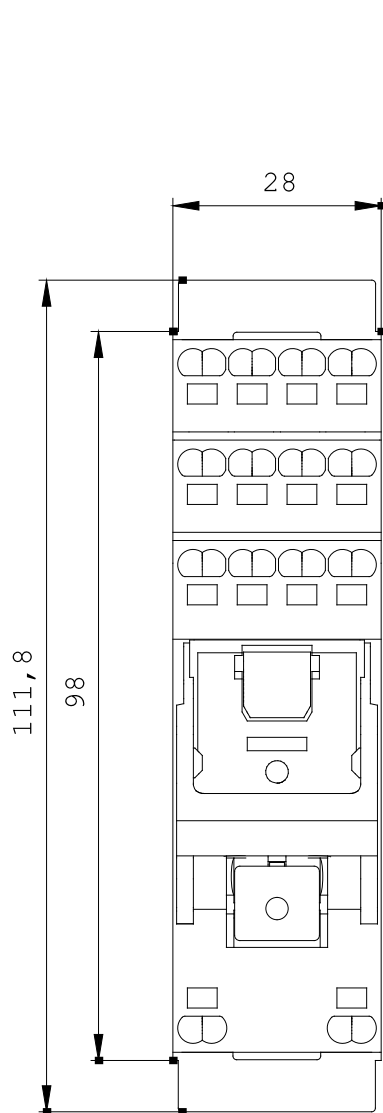

\W9.4444;
 \W9.3333; LZS:E

last change:

Jun 16, 2014