



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.
DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.
The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.
The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.




ELECTRICAL CHARACTERISTICS

	Rotary isolator	Version	Enclosed
Circuit breaker	32	Material	Insulating
Rated current (A)	6P	Type	For emergency
No. of poles	1000	Knob colour	Red
Rated insulation voltage U_i (Vac)	32	Lockable	YES (max. 3 locks in OFF)
Rated operational current AC-21A (415 V) (A)	32	IP degree	IP66/IP67/IP69
Rated operational current AC-22A (415 V) (A)	32	Mechanical resistance	IK08
Rated operational current AC-23A (415 V) (A)	10	Protection against indirect contact	Double insulation
Conditional short circuit current I_{cc} (415 V) (kA)	0,75-16 mm ²	Operating temperature	-25 +60 °C
Cable section	-	Cable entries on top	2 x M25 knock-outs
ACCESSORIES		Cable entries on bottom	2 x M25 knock-outs
Type of accessory	Max. 4 auxiliary contacts (2 per side)		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Resistant	Resistant

DIMENSIONAL

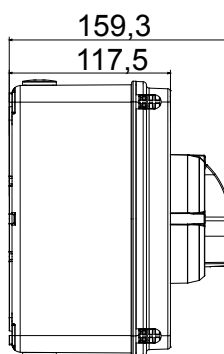

TECHNICAL SYMBOLOGY

IP

IK

IP66/IP67/IP69

IK08

STANDARDS/APPROVALS

