

Product data sheet

Characteristics

RE8YA32BTQ

industrial timing relay - 0.3..30 s - type Qe - 24 V AC/DC - 1 C/O



Main

Range of product	Zelio Time
Product or component type	Optimum industrial timing relay
Component name	RE8
Time delay type	Qe
Time delay range	0.3...30 s
Sale per indivisible quantity	10

Complementary

Discrete output type	Relay
Contacts material	90/10 silver nickel contacts
Width pitch dimension	22.5 mm
[Us] rated supply voltage	24 V AC/DC at 50/60 Hz
Voltage range	0.9...1.1 Us
Connections - terminals	Screw terminals 2 x 2.5 mm ² , flexible cable without cable end Screw terminals 2 x 1.5 mm ² , flexible cable with cable end
Tightening torque	0.6...1.1 N.m
Setting accuracy of time delay	+/- 20 % of full scale
Repeat accuracy	< 1 %
Voltage drift	< 2.5 %/V
Temperature drift	< 0.2 %/°C
Minimum pulse duration	26 ms
Reset time	50 ms
Maximum switching voltage	250 V
Mechanical durability	20000000 cycles
[Ith] conventional free air thermal current	8 A
[Ie] rated operational current	<= 0.2 A at 115 V, DC-13 for 70 °C conforming to VDE 0660 <= 0.2 A at 115 V, DC-13 for 70 °C conforming to IEC 60947-5-1/1991 <= 0.1 A at 250 V, DC-13 for 70 °C conforming to VDE 0660 <= 0.1 A at 250 V, DC-13 for 70 °C conforming to IEC 60947-5-1/1991 <= 3 A at 24 V, AC-15 for 70 °C conforming to VDE 0660 <= 3 A at 24 V, AC-15 for 70 °C conforming to IEC 60947-5-1/1991 <= 2 A at 24 V, DC-13 for 70 °C conforming to VDE 0660 <= 2 A at 24 V, DC-13 for 70 °C conforming to IEC 60947-5-1/1991
Minimum switching capacity	10 mA at 12 V
Marking	CE
Overvoltage category	III conforming to IEC 60664-1
[Ui] rated insulation voltage	300 V conforming to CSA 250 V conforming to IEC
Supply disconnection value	> 0.1 Uc
Operating position	Any position without derating factor
Surge withstand	2 kV conforming to IEC 61000-4-5 level 3
Power consumption in VA	0.9 VA at 24 V
Power consumption in W	0.7 W at 24 V
Terminal description	(15-16)NC_ON (25-28)NO_ON (A1-A2)CO


Height	78 mm
Width	22.5 mm
Depth	80 mm
Product weight	0.11 kg

Environment


Immunity to microbreaks	3 ms
Standards	EN/IEC 61812-1
Product certifications	CSA GL UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-20...60 °C
Relative humidity	15...85 % 3K3 conforming to IEC 60721-3-3
Vibration resistance	0.35 mm 10...55 Hz conforming to IEC 60068-2-6
IP degree of protection	IP50 (casing) IP20 (terminals)
Pollution degree	3 conforming to IEC 60664-1
Dielectric test voltage	2.5 kV
Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	8 kV in air conforming to IEC 61000-4-2 level 3 6 kV in contact conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Disturbance radiated/conducted	CISPR 11 group 1 - class A CISPR 22 - class A

Width 22.5 mm


Rail Mounting



Screw Fixing




Internal Wiring Diagram



Recommended Application Wiring Diagram


Control



K1T Timing relay

NOTE: Correct operation of the star-delta starter associated with the relay is only possible if the wiring diagram is strictly complied with.


Power

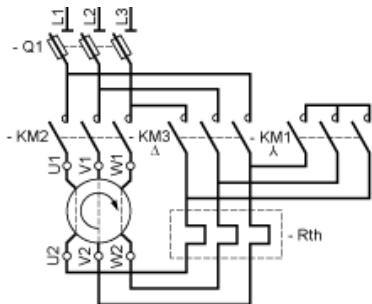

Performance Curves

A.C. Load Curve 1

Electrical durability of contacts on resistive loading millions of operating cycles




X Current broken in A

Y Millions of operating cycles

A.C. Load Curve 2


Reduction factor k for inductive loads (applies to values taken from durability curve 1).




X Power factor on breaking (cos ϕ)

Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For $\cos \phi = 0.3$: $k = 0.6$ The electrical durability therefore becomes: $1.5 \cdot 10^6$ operating cycles $\times 0.6 = 900,000$ operating cycles.



D. C. Load Limit Curve



X Current in A

Y Voltage in V

1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load

Function Qe: Star-Delta Timing

Description

Timing for star-delta starter with contact for switching to star connection.

Function: 1 Output



Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed

C Control contact
G Gate
R Relay or solid state output
R1/ 2 timed outputs
R2
R2 The second output is instantaneous if the right position is selected
inst.
T Timing period
Ta Adjustable On-delay
-
Tr Adjustable Off-delay
-
U Supply