


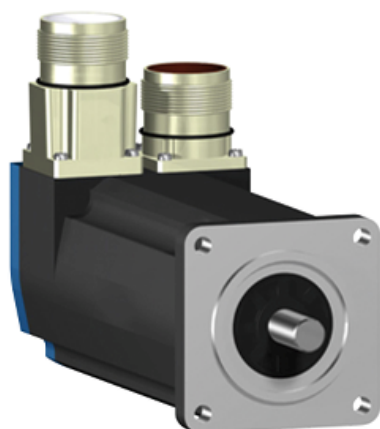

## Main

|                           |             |
|---------------------------|-------------|
| Range compatibility       | PacDrive 3  |
| Product or component type | Servo motor |
| Device short name         | SH3.....P   |

## Complementary

|                           |                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Maximum mechanical speed  | 9000 rpm                                                                                                                         |
| [Us] rated supply voltage | 115...480 V                                                                                                                      |
| Network number of phases  | Three phase                                                                                                                      |
| Continuous stall current  | 0.6 A                                                                                                                            |
| Continuous stall torque   | 0.8 N.m at 115...480 V three phase                                                                                               |
| Peak stall torque         | 2.5 N.m at 115...480 V three phase                                                                                               |
| Nominal output power      | 160 W at 115 V three phase<br>310 W at 230 V three phase<br>600 W at 400 V three phase<br>670 W at 480 V three phase             |
| Nominal torque            | 0.77 N.m at 115 V three phase<br>0.75 N.m at 230 V three phase<br>0.72 N.m at 400 V three phase<br>0.71 N.m at 480 V three phase |
| Nominal speed             | 4000 rpm at 230 V three phase<br>9000 rpm at 480 V three phase<br>2000 rpm at 115 V three phase<br>8000 rpm at 400 V three phase |
| Maximum current Irms      | 4.8 A                                                                                                                            |
| Shaft end                 | Parallel key                                                                                                                     |
| Shaft diameter            | 9 mm                                                                                                                             |
| Shaft length              | 20 mm                                                                                                                            |
| Key width                 | 3 mm                                                                                                                             |
| IP degree of protection   | IP65 motor: conforming to EN/IEC 60034-5                                                                                         |

IP65 shaft bushing: conforming to EN/IEC 60034-5

|                                       |                                                                                                                                                                      |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Encoder type                          | Absolute single turn SinCos Hiperface                                                                                                                                |
| Speed feedback resolution             | 128 periods                                                                                                                                                          |
| Holding brake                         | Without                                                                                                                                                              |
| Mounting support                      | International standard flange                                                                                                                                        |
| Motor flange size                     | 55 mm                                                                                                                                                                |
| Torque constant                       | 0.7 N.m/A at 120 °C                                                                                                                                                  |
| Back emf constant                     | 40 V/krpm at 20 °C                                                                                                                                                   |
| Number of motor poles                 | 3                                                                                                                                                                    |
| Rotor inertia                         | 0.096 kg.cm <sup>2</sup>                                                                                                                                             |
| Stator resistance                     | 17.4 Ohm                                                                                                                                                             |
| Stator inductance                     | 53.54 mH                                                                                                                                                             |
| Maximum radial force Fr               | 370 N at 1000 rpm<br>290 N at 2000 rpm<br>260 N at 3000 rpm<br>230 N at 4000 rpm<br>220 N at 5000 rpm<br>200 N at 6000 rpm<br>190 N at 7000 rpm<br>190 N at 8000 rpm |
| Maximum axial force Fa                | 40 N                                                                                                                                                                 |
| Type of cooling                       | Natural convection                                                                                                                                                   |
| Length                                | 154.4 mm                                                                                                                                                             |
| Centring collar diameter              | 40 mm                                                                                                                                                                |
| Centring collar depth                 | 2 mm                                                                                                                                                                 |
| Number of mounting holes              | 4                                                                                                                                                                    |
| Mounting holes diameter               | 5.5 mm                                                                                                                                                               |
| Circle diameter of the mounting holes | 63 mm                                                                                                                                                                |
| Product weight                        | 1.5 kg                                                                                                                                                               |

## Offer Sustainability

|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | No need of specific recycling operations                                                                                    |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|