


Product datasheet

Characteristics

SH30703P02F1000
servo motor SH3 070
3,1Nm,nokey,multi,brake,str.conn,IP54/IP65,8k
RPM

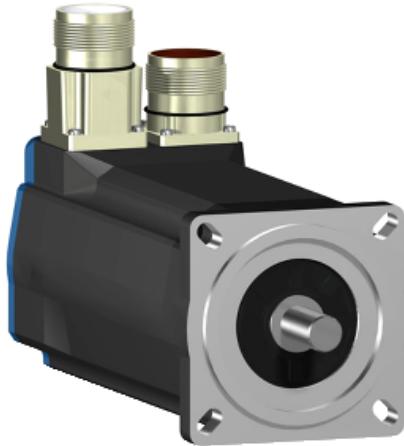

Main

Range compatibility	PacDrive 3
Product or component type	Servo motor
Device short name	SH3.....P

Complementary

Maximum mechanical speed	8000 rpm
[Us] rated supply voltage	115...480 V
Network number of phases	Three phase
Continuous stall current	4.1 A
Continuous stall torque	3.1 N.m at 115...480 V three phase
Peak stall torque	11.3 N.m at 115...480 V three phase
Nominal output power	460 W at 115 V three phase 880 W at 230 V three phase 1450 W at 400 V three phase 1550 W at 480 V three phase
Nominal torque	2.95 N.m at 115 V three phase 2.8 N.m at 230 V three phase 2.3 N.m at 400 V three phase 2.05 N.m at 480 V three phase
Nominal speed	1500 rpm at 115 V three phase 3000 rpm at 230 V three phase 6000 rpm at 400 V three phase 7200 rpm at 480 V three phase
Maximum current I_{rms}	17 A
Shaft end	Smooth shaft
Shaft diameter	14 mm
Shaft length	30 mm
Key width	5 mm
IP degree of protection	IP54 shaft bushing without shaft seal ring: conforming to EN/IEC 60034-5

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	IP65 motor: conforming to EN/IEC 60034-5 IP65 shaft bushing: conforming to EN/IEC 60034-5
Encoder type	Absolute multturn SinCos Hiperface
Speed feedback resolution	128 periods
Holding brake	With
Holding torque	2 N.m
Mounting support	International standard flange
Motor flange size	70 mm
Torque constant	0.78 N.m/A at 120 °C
Back emf constant	49 V/krpm at 20 °C
Number of motor poles	3
Rotor inertia	0.807 kg.cm ²
Stator resistance	2.7 Ohm
Stator inductance	20.3 mH
Maximum radial force Fr	730 N at 1000 rpm 580 N at 2000 rpm 510 N at 3000 rpm 460 N at 4000 rpm 430 N at 5000 rpm 400 N at 6000 rpm
Maximum axial force Fa	80 N
Type of cooling	Natural convection
Length	254 mm
Centring collar diameter	60 mm
Centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Product weight	3.8 kg

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------