



# DFS60I-S4VK03600

DFS60 Inox

INCREMENTAL ENCODERS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type             | Part no. |
|------------------|----------|
| DFS60I-S4VK03600 | 1090662  |

Other models and accessories → [www.sick.com/DFS60\\_Inox](http://www.sick.com/DFS60_Inox)

## Detailed technical data

### Performance

|                                                               |                                    |
|---------------------------------------------------------------|------------------------------------|
| <b>Pulses per revolution</b>                                  | 3,600 <sup>1)</sup>                |
| <b>Measuring step</b>                                         | 90° electric/pulses per revolution |
| <b>Measuring step deviation at non binary number of lines</b> | ± 0.008°                           |
| <b>Error limits</b>                                           | ± 0.03°                            |

<sup>1)</sup> See maximum revolution range.

### Interfaces

|                                        |                                                                 |
|----------------------------------------|-----------------------------------------------------------------|
| <b>Communication interface</b>         | Incremental                                                     |
| <b>Communication Interface detail</b>  | TTL / RS-422                                                    |
| <b>Number of signal channels</b>       | 6-channel                                                       |
| <b>0-set function via hardware pin</b> | ✓                                                               |
| <b>0-SET function</b>                  | H-active, L ≡ 0 - 3 V, H ≡ 4.0 - U <sub>s</sub> V <sup>1)</sup> |
| <b>Initialization time</b>             | 30 ms                                                           |
| <b>Output frequency</b>                | ≤ 820 kHz                                                       |
| <b>Load current</b>                    | ≤ 30 mA                                                         |
| <b>Power consumption</b>               | ≤ 0.7 W (without load)                                          |

<sup>1)</sup> Only with devices with M12 connector in connection with electrical interfaces M, V and W.

### Electrical data

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| <b>Connection type</b>            | Cable, 12-wire, radial, 1.5 m               |
| <b>Supply voltage</b>             | 4.5 ... 32 V                                |
| <b>Reference signal, number</b>   | 1                                           |
| <b>Reference signal, position</b> | 90°, electric, logically gated with A and B |

<sup>1)</sup> Short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| <b>Reverse polarity protection</b>             | ✓                                        |
| <b>Short-circuit protection of the outputs</b> | ✓ <sup>1)</sup>                          |
| <b>MTTFd: mean time to dangerous failure</b>   | 300 years (EN ISO 13849-1) <sup>2)</sup> |

<sup>1)</sup> Short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Mechanical data

|                                               |                                         |
|-----------------------------------------------|-----------------------------------------|
| <b>Mechanical design</b>                      | Solid shaft, face mount flange          |
| <b>Shaft diameter</b>                         | 10 mm                                   |
| <b>Wavelength</b>                             | 19 mm                                   |
| <b>Weight</b>                                 | + 0.5 kg                                |
| <b>Shaft material</b>                         | Stainless steel V2A                     |
| <b>Flange material</b>                        | Stainless steel V2A                     |
| <b>Housing material</b>                       | Stainless steel V2A                     |
| <b>Start up torque</b>                        | 1 Ncm (+20 °C)                          |
| <b>Operating torque</b>                       | 0.5 Ncm (+20 °C)                        |
| <b>Permissible shaft loading radial/axial</b> | 80 N (radial)<br>40 N (axial)           |
| <b>Operating speed</b>                        | ≤ 9,000 min <sup>-1</sup> <sup>1)</sup> |
| <b>Moment of inertia of the rotor</b>         | 6.2 gcm <sup>2</sup>                    |
| <b>Bearing lifetime</b>                       | 3.6 x 10 <sup>10</sup> revolutions      |
| <b>Angular acceleration</b>                   | ≤ 500,000 rad/s <sup>2</sup>            |

<sup>1)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-3                                               |
| <b>Enclosure rating</b>              | IP67, housing side (according to IEC 60529)<br>IP67, shaft side (according to IEC 60529) |
| <b>Permissible relative humidity</b> | 90 % (condensation of the optical scanning not permitted)                                |
| <b>Operating temperature range</b>   | -40 °C ... +100 °C <sup>1)</sup><br>-30 °C ... +100 °C <sup>2)</sup>                     |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package                                                      |
| <b>Resistance to shocks</b>          | 100 g, 6 ms (according to EN 60068-2-27)                                                 |
| <b>Resistance to vibration</b>       | 10 g, 10 Hz ... 2,000 Hz (according to EN 60068-2-6)                                     |

<sup>1)</sup> Stationary position of the cable.

<sup>2)</sup> Flexible position of the cable.



## Classifications

|                     |          |
|---------------------|----------|
| <b>ECI@ss 5.0</b>   | 27270501 |
| <b>ECI@ss 5.1.4</b> | 27270501 |
| <b>ECI@ss 6.0</b>   | 27270590 |
| <b>ECI@ss 6.2</b>   | 27270590 |
| <b>ECI@ss 7.0</b>   | 27270501 |

### Dimensional drawing (Dimensions in mm (inch))

Technical drawing of a mechanical part with dimensions and tolerances. The drawing includes a top view and a side view. Key dimensions and tolerances are as follows:

- Top View:**
  - Overall width:  $43.6 \pm 1.72$
  - Distance from left edge to centerline:  $19 \pm 0.3$  (0.75)
  - Distance from centerline to right edge:  $18$  (0.71)
  - Distance from left edge to first step:  $10 \pm 0.13$  (0.39)
  - Distance from first step to second step:  $10 \pm 0.13$  (0.39)
  - Distance from second step to third step:  $10 \pm 0.13$  (0.39)
  - Distance from third step to right edge:  $11.5$  (0.45)
  - Distance from left edge to centerline:  $18$  (0.71)
  - Distance from centerline to right edge:  $18$  (0.71)
  - Distance from left edge to first step:  $10 \pm 0.13$  (0.39)
  - Distance from first step to second step:  $10 \pm 0.13$  (0.39)
  - Distance from second step to third step:  $10 \pm 0.13$  (0.39)
  - Distance from third step to right edge:  $11.5$  (0.45)
- Side View:**
  - Overall height:  $60.3 \pm 0.75$  (2.37)
  - Distance from top edge to first step:  $17.1$  (0.67)
  - Distance from first step to second step:  $17.1$  (0.67)
  - Distance from second step to third step:  $17.1$  (0.67)
  - Distance from third step to bottom edge:  $17.1$  (0.67)
- Surface Tolerances:**
  - Surface A:  $0.1$
  - Surface B:  $0.05$
  - Surface C:  $0.05$
  - Surface D:  $0.03$
- Form Tolerances:**
  - Feature 1:  $0.04$
  - Feature 2:  $0.03$
  - Feature 3:  $0.03$
  - Feature 4:  $0.03$
- Material:** M12 x 1

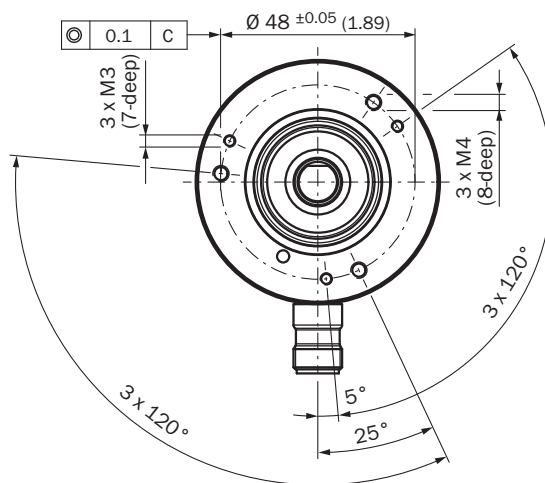

PIN assignment

View of M12, 8-pin male device connector on encoder



View of M12, 12-pin male device connector on encoder



| PIN, 8-pin, M12 male connector | PIN, 12-pin, M12 male connector | Color of the wires for encoders with cable outlet | TTL/HTL signal      | Sin/cos 1.0 V <sub>SS</sub> | Explanation                                                                          |
|--------------------------------|---------------------------------|---------------------------------------------------|---------------------|-----------------------------|--------------------------------------------------------------------------------------|
| 1                              | 7                               | Brown                                             | $\bar{A}$           | COS-                        | Signal wire                                                                          |
| 2                              | 6                               | White                                             | A                   | COS+                        | Signal wire                                                                          |
| 3                              | 9                               | Black                                             | $\bar{B}$           | SIN-                        | Signal wire                                                                          |
| 4                              | 8                               | Pink                                              | B                   | SIN+                        | Signal wire                                                                          |
| 5                              | 4                               | Yellow                                            | $\bar{Z}$           | $\bar{Z}$                   | Signal wire                                                                          |
| 6                              | 11                              | Violet                                            | Z                   | Z                           | Signal wire                                                                          |
| 7                              | 12                              | Blue                                              | GND                 | GND                         | Ground connection of the encoder                                                     |
| 8                              | 5                               | Red                                               | +U <sub>s</sub>     | +U <sub>s</sub>             | Supply voltage (volt-free to housing)                                                |
| -                              | 2                               | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 3                               | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 1                               | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 10 <sup>1)</sup>                | -                                                 | O-SET <sup>1)</sup> | n.c.                        | Set zero pulse <sup>1)</sup>                                                         |
| Screen                         | Screen                          | Screen                                            | Screen              | Screen                      | Screen connected to housing on encoder side.<br>Connected to ground on control side. |

<sup>1)</sup> For electrical interfaces only: M, V, W with O-SET function on PIN 10 on M12 male connector. The O-SET input is used to set the zero pulse on the current shaft position. If the O-SET input is connected to U<sub>s</sub> for longer than 250 ms after it had previously been unassigned for at least 1,000 ms or had been connected to the GND, the current position of the shaft is assigned to the zero pulse signal "Z".

Maximum revolution range

Maximum revolution range



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)