



# DFS60I-S4PC01024

DFS60 Inox

**INCREMENTAL ENCODERS**

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type             | Part no. |
|------------------|----------|
| DFS60I-S4PC01024 | 1106600  |

Other models and accessories → [www.sick.com/DFS60\\_Inox](http://www.sick.com/DFS60_Inox)

## Detailed technical data

### Performance

|                                                           |                                    |
|-----------------------------------------------------------|------------------------------------|
| <b>Pulses per revolution</b>                              | 1,024 <sup>1)</sup>                |
| <b>Measuring step</b>                                     | 90° electric/pulses per revolution |
| <b>Measuring step deviation at binary number of lines</b> | ± 0.008°                           |
| <b>Error limits</b>                                       | ± 0.03°                            |

<sup>1)</sup> See maximum revolution range.

### Interfaces

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| <b>Communication interface</b>        | Incremental                       |
| <b>Communication Interface detail</b> | TTL / HTL                         |
| <b>Factory setting</b>                | Factory setting: output level TTL |
| <b>Number of signal channels</b>      | 6-channel                         |
| <b>Programmable/configurable</b>      | ✓                                 |
| <b>Initialization time</b>            | 32 ms <sup>1)</sup><br>30 ms      |
| <b>Output frequency</b>               | ≤ 820 kHz                         |
| <b>Load current</b>                   | ≤ 30 mA                           |
| <b>Power consumption</b>              | ≤ 0.7 W (without load)            |

<sup>1)</sup> With mechanical zero pulse width.

### Electrical data

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Connection type</b>          | Male connector, M12, 8-pin, radial |
| <b>Supply voltage</b>           | 4.5 ... 32 V                       |
| <b>Reference signal, number</b> | 1                                  |

<sup>1)</sup> Programming TTL with ≥ 5.5 V: short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> Programming HTL or TTL with < 5.5 V: short-circuit opposite to another channel, US or GND permissible for maximum 30 s.

<sup>3)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

|                                                |                                             |
|------------------------------------------------|---------------------------------------------|
| <b>Reference signal, position</b>              | 90°, electric, logically gated with A and B |
| <b>Reverse polarity protection</b>             | ✓                                           |
| <b>Short-circuit protection of the outputs</b> | ✓ <sup>1) 2)</sup>                          |
| <b>MTTFd: mean time to dangerous failure</b>   | 300 years (EN ISO 13849-1) <sup>3)</sup>    |

<sup>1)</sup> Programming TTL with  $\geq 5.5$  V: short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> Programming HTL or TTL with  $< 5.5$  V: short-circuit opposite to another channel, US or GND permissible for maximum 30 s.

<sup>3)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Mechanical data

|                                               |                                             |
|-----------------------------------------------|---------------------------------------------|
| <b>Mechanical design</b>                      | Solid shaft, face mount flange              |
| <b>Shaft diameter</b>                         | 10 mm                                       |
| <b>Wavelength</b>                             | 19 mm                                       |
| <b>Weight</b>                                 | + 0.5 kg                                    |
| <b>Shaft material</b>                         | Stainless steel V2A                         |
| <b>Flange material</b>                        | Stainless steel V2A                         |
| <b>Housing material</b>                       | Stainless steel V2A                         |
| <b>Start up torque</b>                        | 1 Ncm (+20 °C)                              |
| <b>Operating torque</b>                       | 0.5 Ncm (+20 °C)                            |
| <b>Permissible shaft loading radial/axial</b> | 80 N (radial)<br>40 N (axial)               |
| <b>Operating speed</b>                        | $\leq 9,000 \text{ min}^{-1}$ <sup>1)</sup> |
| <b>Moment of inertia of the rotor</b>         | 6.2 gcm <sup>2</sup>                        |
| <b>Bearing lifetime</b>                       | 3.6 x 10 <sup>10</sup> revolutions          |
| <b>Angular acceleration</b>                   | $\leq 500,000 \text{ rad/s}^2$              |

<sup>1)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                      |                                                                                                        |
|--------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-3                                                             |
| <b>Enclosure rating</b>              | IP67, housing side (according to IEC 60529) <sup>1)</sup><br>IP67, shaft side (according to IEC 60529) |
| <b>Permissible relative humidity</b> | 90 % (condensation of the optical scanning not permitted)                                              |
| <b>Operating temperature range</b>   | -40 °C ... +100 °C <sup>2)</sup><br>-30 °C ... +100 °C <sup>3)</sup>                                   |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package                                                                    |
| <b>Resistance to shocks</b>          | 100 g, 6 ms (according to EN 60068-2-27)                                                               |
| <b>Resistance to vibration</b>       | 10 g, 10 Hz ... 2,000 Hz (according to EN 60068-2-6)                                                   |

<sup>1)</sup> With mating connector fitted.

<sup>2)</sup> Stationary position of the cable.

<sup>3)</sup> Flexible position of the cable.


## Classifications

|                     |          |
|---------------------|----------|
| <b>ECl@ss 5.0</b>   | 27270501 |
| <b>ECl@ss 5.1.4</b> | 27270501 |
| <b>ECl@ss 6.0</b>   | 27270590 |




PIN assignment

View of M12, 8-pin male device connector on encoder




View of M12, 12-pin male device connector on encoder



<sup>1)</sup> For electrical interfaces only: M, V, W with O-SET function on PIN 10 on M12 male connector. The O-SET input is used to set the zero pulse on the current shaft position. If the O-SET input is connected to U<sub>s</sub> for longer than 250 ms after it had previously been unassigned for at least 1,000 ms or had been connected to the GND, the current position of the shaft is assigned to the zero pulse signal "Z".


Maximum revolution range

Maximum revolution range

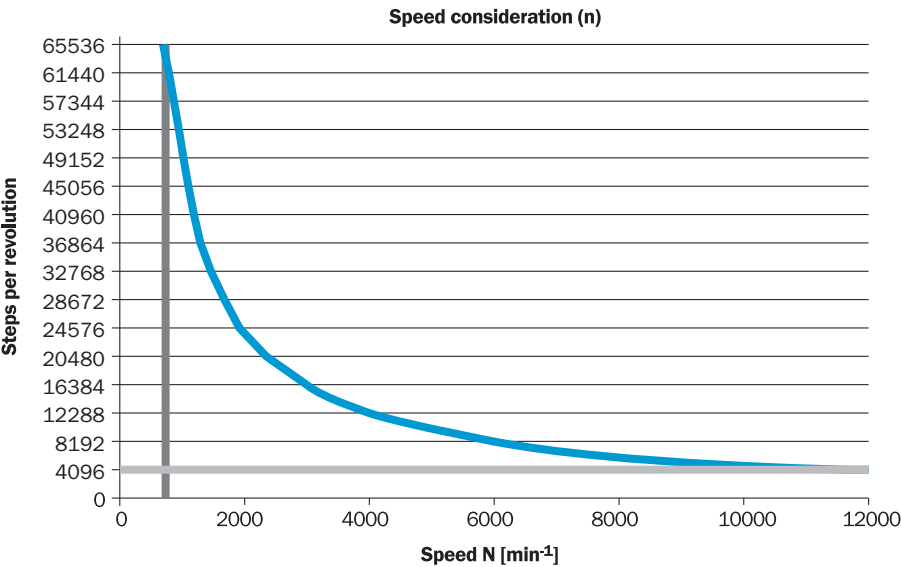

## Signal outputs


Signal outputs

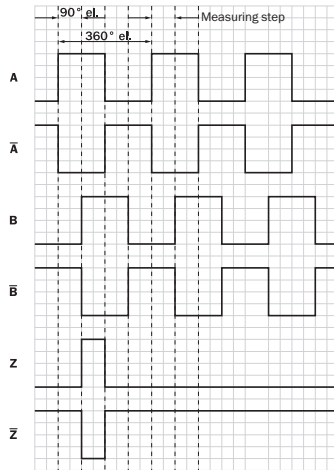

CW with view on the encoder shaft in direction "A", compare dimensional drawing.


## Diagrams

Electrical zero pulse width can be configured to 90°, 180°, or 270°. Width of the zero pulse in relation to a pulse period.

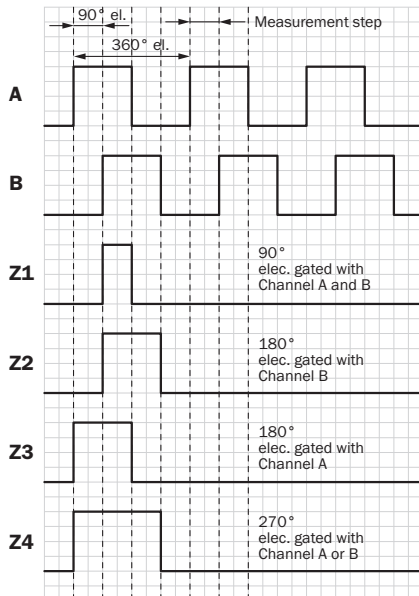

Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Mechanical zero pulse width 1° to 359° programmable. Width of the zero pulse in relation to a mechanical revolution of the shaft.

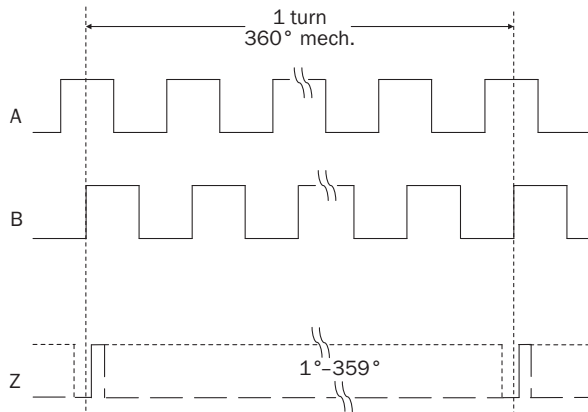

## Recommended accessories

Other models and accessories → [www.sick.com/DFS60\\_Inox](http://www.sick.com/DFS60_Inox)

|                            | Brief description                                                                                                                    | Type               | Part no. |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables |                                                                                                                                      |                    |          |
|                            | Head A: female connector, M12, 8-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, SSI, PUR, halogen-free, shielded, 2 m  | DOL-1208-G02MAC1   | 6032866  |
|                            | Head A: female connector, M12, 8-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, SSI, PUR, halogen-free, shielded, 5 m  | DOL-1208-G05MAC1   | 6032867  |
|                            | Head A: female connector, M12, 8-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, SSI, PUR, halogen-free, shielded, 10 m | DOL-1208-G10MAC1   | 6032868  |
|                            | Head A: female connector, M12, 8-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, SSI, PUR, halogen-free, shielded, 20 m | DOL-1208-G20MAC1   | 6032869  |
|                            | Head A: female connector, M12, 8-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, SSI, PUR, halogen-free, shielded, 25 m | DOL-1208-G25MAC1   | 6067859  |
|                            | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: -<br>Cable: shielded                                              | YF12ES8-0050S5586A | 2097334  |
|                            | Head A: male connector, M12, 8-pin, straight, A-coded<br>Head B: -<br>Cable: shielded                                                | YM12ES8-0050S5586A | 2097337  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)