



# SGS4-S092P3PS2W00

SLG

SWITCHING AUTOMATION LIGHT GRIDS

**SICK**  
Sensor Intelligence.



## Ordering information

| Type              | Part no. |
|-------------------|----------|
| SGS4-S092P3PS2W00 | 1214817  |

Other models and accessories → [www.sick.com/SLG](http://www.sick.com/SLG)



## Detailed technical data

### Features

|                                        |                                            |
|----------------------------------------|--------------------------------------------|
| <b>Sensor principle</b>                | Sender/receiver                            |
| <b>Minimum detectable object (MDO)</b> | Parallel beam, 45 mm                       |
| <b>Beam separation</b>                 | 40 mm                                      |
| <b>Optical light exit</b>              | Slim                                       |
| <b>Number of beams</b>                 | 24                                         |
| <b>Detection height</b>                | 920 mm                                     |
| <b>Configuration</b>                   | None                                       |
| <b>Cross beam/parallel beam</b>        | Parallel beam active                       |
| <b>Output 1</b>                        | Output 1 active, if light beam interrupted |
| <b>Automatic teach</b>                 | Automatic teach inactive                   |
| <b>Alignment aid</b>                   | Without alignment aid                      |
| <b>Muting function</b>                 | Muting function deactivated                |

### Mechanics/electronics

|                                                   |                           |
|---------------------------------------------------|---------------------------|
| <b>Light source</b>                               | Infrared light            |
| <b>Wave length</b>                                | 950 nm                    |
| <b>Supply voltage <math>V_s</math></b>            | DC24 V, $\pm 20\%$        |
| <b>Power consumption sender</b>                   | $\leq 160\text{ mA}^{1)}$ |
| <b>Power consumption receiver</b>                 | $\leq 70\text{ mA}$       |
| <b>Output current <math>I_{\text{max}}</math></b> | 100 mA                    |
| <b>Output load capacitive</b>                     | 100 nF                    |
| <b>Output load inductive</b>                      | 1 H                       |
| <b>Initialization time</b>                        | 1 s                       |
| <b>Switching output</b>                           | PNP                       |
| <b>Inputs</b>                                     | Teach-in input (receiver) |

<sup>1)</sup> , without load.

<sup>2)</sup> Operating in outdoor condition only with a external protection housing.

|                               |                                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|
|                               | Test input (sender)                                                                                                          |
| <b>Dimensions (W x H x D)</b> | 36.5 mm x 992.4 mm x 12.4 mm                                                                                                 |
| <b>Connection type</b>        | Cable with M8 male connector, 4-pin                                                                                          |
| <b>Housing material</b>       | PMMA                                                                                                                         |
| <b>Indication</b>             | LED                                                                                                                          |
| <b>Synchronization</b>        | Optical                                                                                                                      |
| <b>Enclosure rating</b>       | IP65<br>2)                                                                                                                   |
| <b>Circuit protection</b>     | U <sub>V</sub> connections, reverse polarity protected<br>Output Q short-circuit protected<br>Interference pulse suppression |
| <b>Protection class</b>       | III                                                                                                                          |
| <b>Weight</b>                 | 120 g                                                                                                                        |
| <b>Pulse frequency</b>        | 500 kHz                                                                                                                      |
| <b>Aluminum stabilizer</b>    | With stabilizer                                                                                                              |

<sup>1)</sup> , without load.

<sup>2)</sup> Operating in outdoor condition only with a external protection housing.

## Performance

|                        |                      |
|------------------------|----------------------|
| <b>Maximum range</b>   | 4 m <sup>1)</sup>    |
| <b>Minimum range</b>   | Parallel beam: ≥ 0 m |
| <b>Operating range</b> | 3 m                  |
| <b>Response time</b>   | Parallel beam, 19 ms |

<sup>1)</sup> No reserve for environmental issue and deterioration of the diode.

## Ambient data

|                                      |                                                          |
|--------------------------------------|----------------------------------------------------------|
| <b>EMC</b>                           | EN 60947-5-2                                             |
| <b>Ambient operating temperature</b> | -25 °C +55 °C                                            |
| <b>Ambient storage temperature</b>   | -25 °C +70 °C                                            |
| <b>Ambient light immunity</b>        | Direct: 100,000 lx <sup>1)</sup><br>Indirect: 150,000 lx |
| <b>Vibration resistance</b>          | 5 g, 10 Hz ... 55 Hz (IEC 68-2-6)                        |
| <b>Shock load</b>                    | 10 g / DIN EN 60068-2-29 / 16 ms                         |

<sup>1)</sup> Sunlight.

## Classifications


|                     |          |
|---------------------|----------|
| <b>ECI@ss 5.0</b>   | 27270910 |
| <b>ECI@ss 5.1.4</b> | 27270910 |
| <b>ECI@ss 6.0</b>   | 27270910 |
| <b>ECI@ss 6.2</b>   | 27270910 |
| <b>ECI@ss 7.0</b>   | 27270910 |
| <b>ECI@ss 8.0</b>   | 27270910 |
| <b>ECI@ss 8.1</b>   | 27270910 |
| <b>ECI@ss 9.0</b>   | 27270910 |
| <b>ECI@ss 10.0</b>  | 27270910 |

|                |          |
|----------------|----------|
| ECI@ss 11.0    | 27270910 |
| ETIM 5.0       | EC002549 |
| ETIM 6.0       | EC002549 |
| ETIM 7.0       | EC002549 |
| UNSPSC 16.0901 | 39121528 |

Dimensional drawing (Dimensions in mm (inch))

Sxx-Sxxxxxx2xxx

Slim, with stabilizer

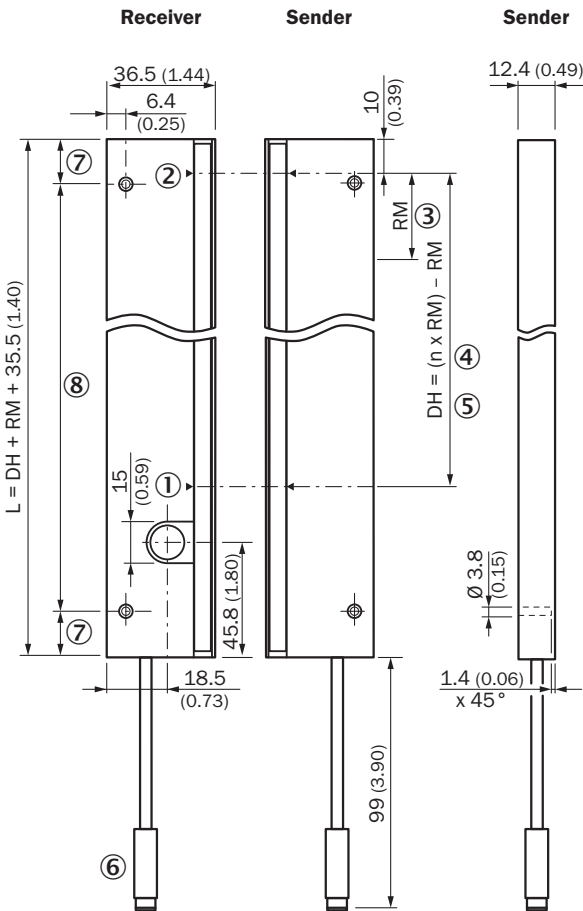


- ① First beam
- ② Last beam
- ③ Beam separation (RM)
- ④ Number of beams (n)
- ⑤ Detection height (DH)
- ⑥ Connection
- ⑦ Same distance
- ⑧ See table (hole spacing stabilizer)

| Hole spacing stabilizer |                 |                            |                                      |
|-------------------------|-----------------|----------------------------|--------------------------------------|
| Monitoring height (MH)  | Number of holes | Distance between the holes | Distance first hole to the last hole |
| 0120                    | 2               | 160                        | 160                                  |
| 0280                    | 2               | 320                        | 320                                  |

| Hole spacing stabilizer |   |     |      |
|-------------------------|---|-----|------|
| 0440                    | 2 | 320 | 320  |
| 0600                    | 3 | 320 | 640  |
| 0760                    | 3 | 320 | 640  |
| 0920                    | 4 | 320 | 960  |
| 1080                    | 4 | 320 | 960  |
| 1240                    | 5 | 320 | 1280 |
| 1400                    | 5 | 320 | 1280 |

## Connection type and diagram


Connection type and diagram

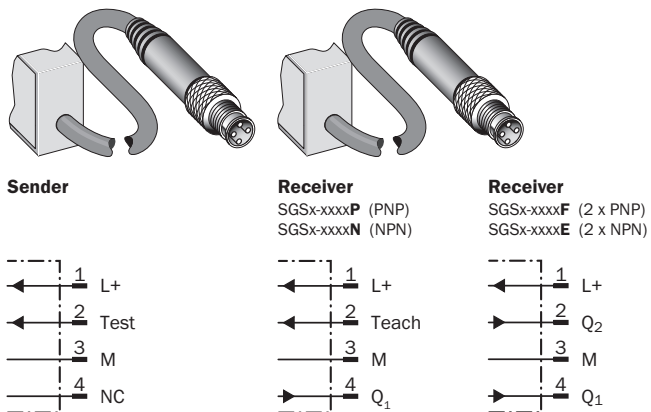

## Concept of operation

Specific features

### Optical synchronization



The light grid communicates via the light beams. A cable is not necessary for the optical synchronization.

Funktionsprinzip

Slim & Flat



- ① Slim model = light emission on narrow side  
② Flat model = light emission on broad side

Recommended accessories

Other models and accessories → [www.sick.com/SLG](http://www.sick.com/SLG)

|                                                                                     | Brief description                                                                                                                                                                                            | Type               | Part no. |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Mounting brackets and plates                                                        |                                                                                                                                                                                                              |                    |          |
|   | Mounting bracket for light grids from a detection height of 600 mm (with slot, recommended for compensation of material extension caused by temperature), mounting position: front, 2x BEF-SLG1, 2x BEF-SLG2 | BEF-SLG-SET1       | 2055427  |
| Plug connectors and cables                                                          |                                                                                                                                                                                                              |                    |          |
|  | Head A: female connector, M8, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 2 m                                                                         | YF8U14-020VA3XLEAX | 2095888  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)