

Main

Product or component type	Passive filter
Product specific application	Reduction of current harmonics


Complementary

Range compatibility	Altivar 61 Altivar 71
[Us] rated supply voltage	400 V (+/- 10 %)
Power supply frequency	50 Hz (tolerance: +/- 5 %)
Quantity per drive	1 filter per drive for ATV71WD22N4 1 filter per drive for ATV71HD22N4 1 filter per drive for ATV61WD22N4C 1 filter per drive for ATV61WD22N4 1 filter per drive for ATV61HD22N4
[In] rated current	43 A
Network number of phases	3 phases
THDI	16 % for ATV71WD22N4 motor: 22 kW / 30 hp 16 % for ATV71HD22N4 motor: 22 kW / 30 hp 16 % for ATV61HD22N4 motor: 22 kW / 30 hp 10 % for ATV61WD22N4C motor: 22 kW / 30 hp 10 % for ATV61WD22N4 motor: 22 kW / 30 hp
Max current	1.5 x nominal current
Efficiency	98 %
Cos phi	0.99 at 100 % of line current 0.85 at 75 % of line current 1 at 150 % of line current
Electrical connection	Terminal, connection capacity: 50 mm ²
Electrical insulation class	Class F
Product weight	38 kg

Environment

IP degree of protection	IP20
Relative humidity	5...85 % without condensation
Ambient air temperature for operation	5...40 °C without current derating > 40...55 °C with current derating 3 % per °C
Ambient air temperature for storage	> -25...55 °C
Operating altitude	> 1000...4000 m with current derating 5 % per 1000 m <= 1000 m without current derating

Dimensions

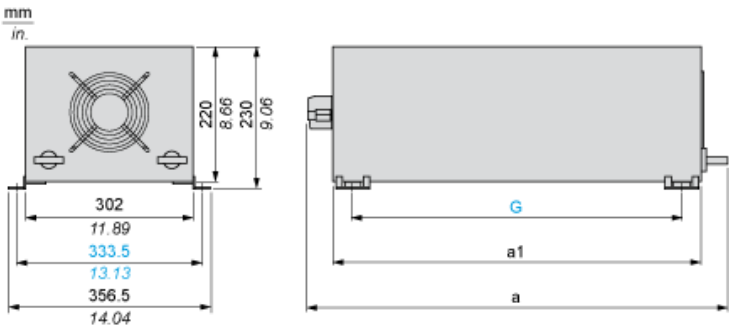

Dimensions in mm

a	a1	G
698	600	532.5

Dimensions in in.

a	a1	G
27.48	23.62	20.96

Mounting Recommendations

Vertical Mounting Only

