

XPSMF2DO401

Preventa safety remote output discrete module
- 4 O not isolated



Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety remote output discrete module
Safety module name	XPSMF2
Safety module application	Extension of I/O capacity
Safety use category	Category 4 maximum conforming to EN 954-1 Performance level e conforming to EN/ISO 13849-1 SIL 3 conforming to EN/IEC 61508
Function of module	Monitoring safety actuators Monitoring safety dialogue
[Us] rated supply voltage	24 V DC (- 15...20 %)
Supply	SELV or PELV conforming to EN/IEC 60950
Discrete output number	4, not isolated
Structure type	10BASE-T/100BASE-TX

Complementary

Response time	Depending on size of application
Associated fuse rating	10 A, slow-blow
Discrete output current	<= 20 A (per channel) <= 5 A (per module)
Inductive load	500 mH
Tungsten load	60 W
Leakage current	<= 1 mA, at 2 V at state 0
Communication port protocol	Safe Ethernet with 2 RJ45 port(s), transmission rate: 100 Mbps, 10 Mbps, medium: dual twisted pair cable, category 5D or better
Exchange mode	Half duplex, full duplex, autonegotiation
Number of terminal blocks	4 for discrete output
Current consumption	0.5 A at 24 V DC on power supply
Mounting support	35 mm symmetrical DIN rail
Depth	66.5 mm
Height	109 mm
Width	152 mm
Product weight	0.8 kg


Environment

IP degree of protection	IP20
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Housing Elements

Front View

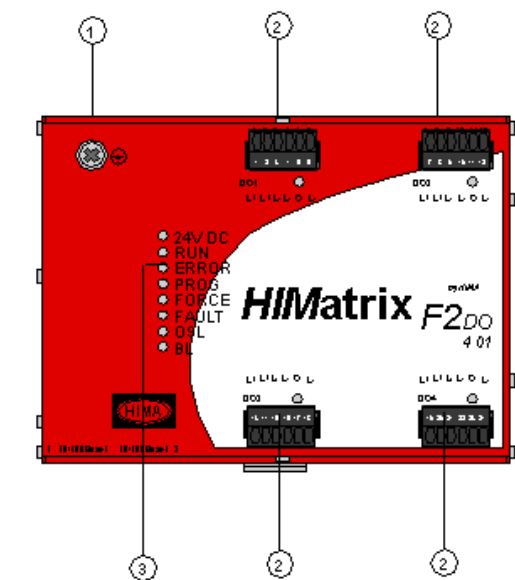


No.	Description
1	power supply input
2	digital power outputs
3	Indicators

Top View

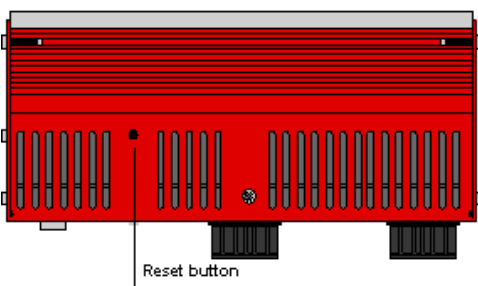


Bottom View

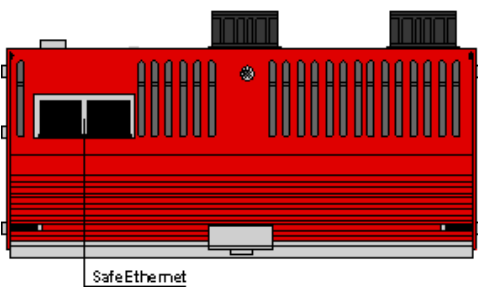

Dimensions


Front View

mm
inch

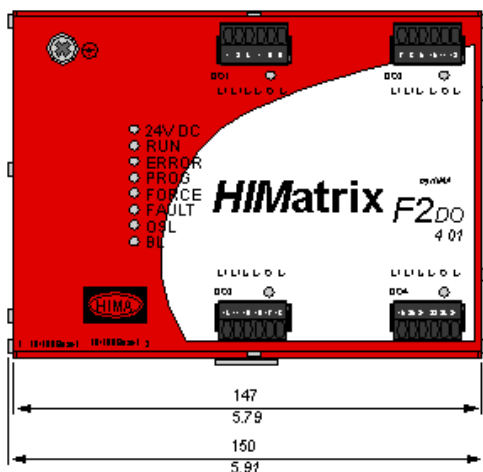


Side View

mm
inch

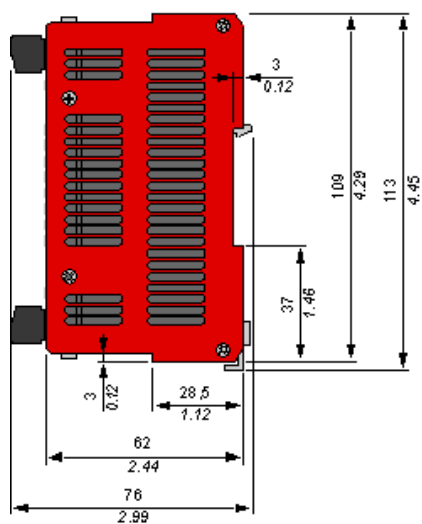


Mounting

Minimum Clearances

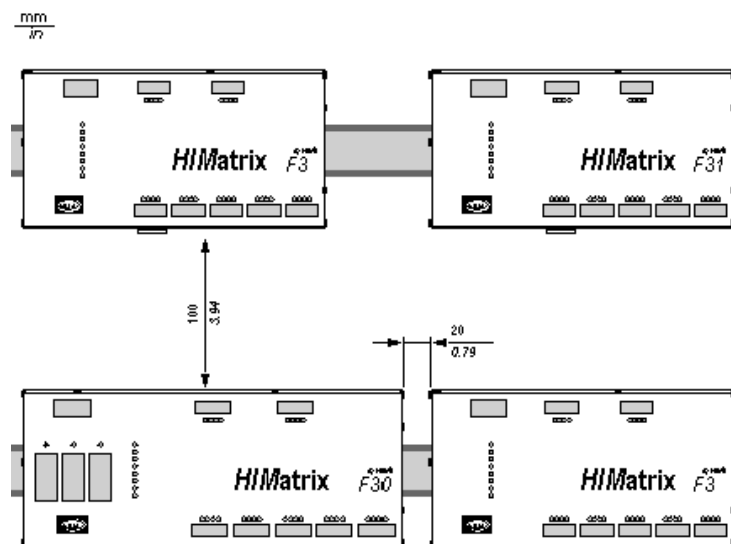

Air Circulation

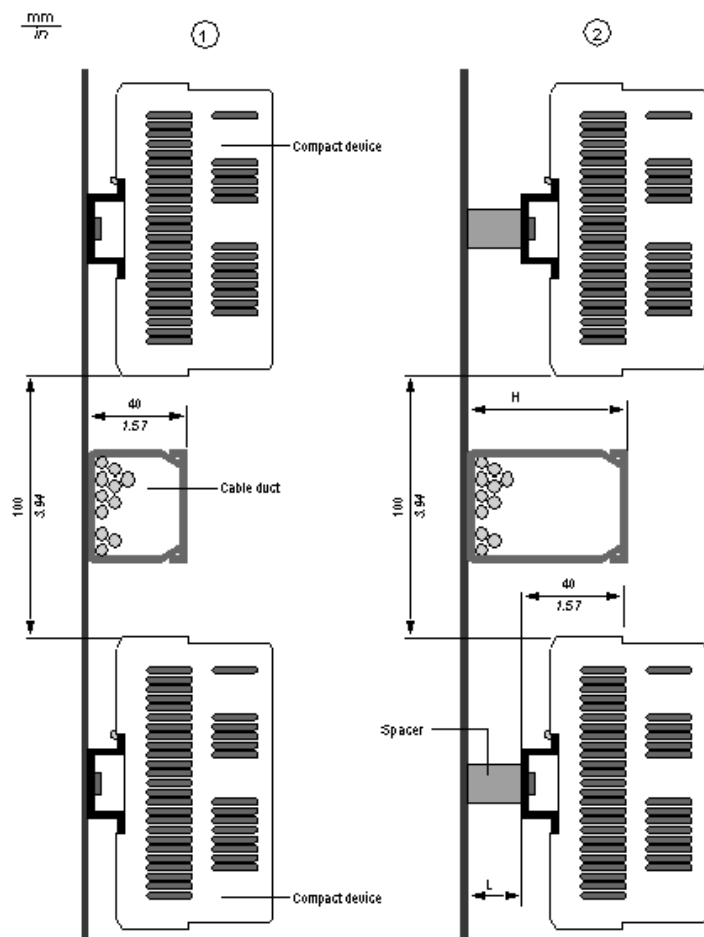


No.	Description
1	The height of the cable ducts is less than 40 mm / 1.57 in.
2	The height of the cable ducts is greater than 40 mm / 1.57 in.

$L = H - 40 \text{ mm} / 1.57 \text{ in.}$


L = length of the spacer

H = height of the cable duct

Minimum clearance when $H > 40 \text{ mm} / 1.57 \text{ in.}$ and no spacer

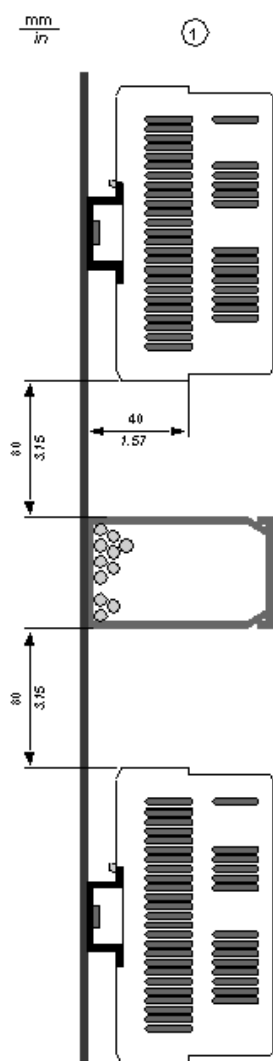

Mounting Precautions Relating to RJ45 Connector

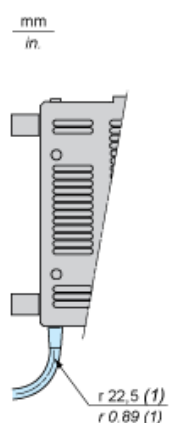

(1) minimum value